

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 130210 - HSK 1532GS

Geïsoleerde Kabelschoen Waterdicht

Package type: BX á 50 pce

/productimages/130210.jpg

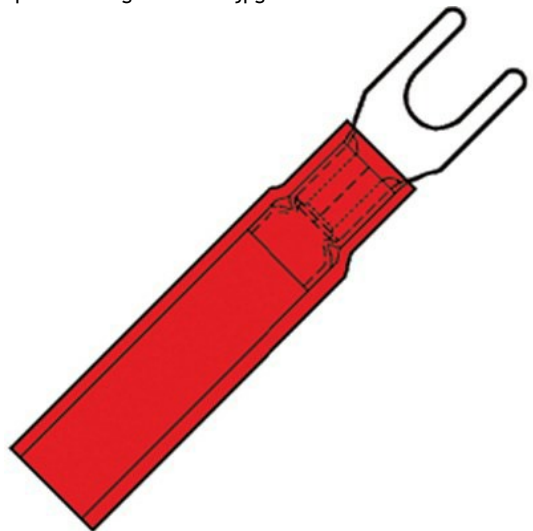

**PRODUCT SPECIFICATIONS:**

Bolt dimension (metric)	3.5
Flange shape	Fork shape
Insulation	Polyethylene (PE)
Insulated	Yes
Colour insulation	Red
Nominal cross section (mm <sup>2</sup> )	0.34 - 1.65
Reel/roll packaging	No
Sleeve form	Short
Colour	Red
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Temperature protected till (°C)	75
For pull protected connections	Yes
Material	Copper
Surface protection	Tinned
Max. current (I <sub>max</sub> ) (A)	19
Stud size (imperial)	Other
Halogen free	Yes
Total length (mm)	33
(mm)	4.2
(mm)	6.4
(mm)	33
Amperage (A)	19
(V)	600
Watertight	Yes
No	
No	
No	