

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl


klemko®

131030 - HSK4610R

Geïsoleerde Kabelschoen Waterdicht

Package type: BX á 50 pce

/productimages/131030.jpg

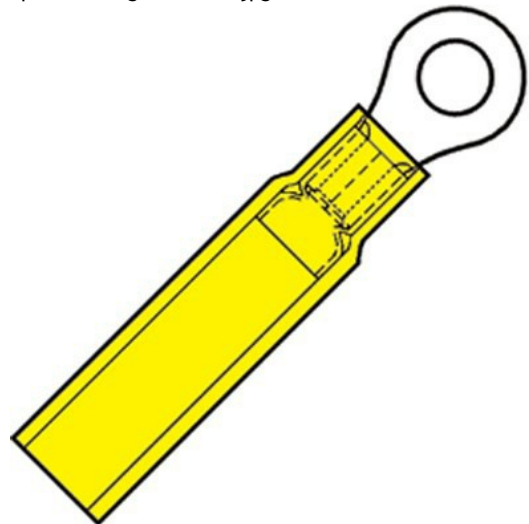

PRODUCT SPECIFICATIONS:

Bolt dimension (metric)	10
Flange shape	Ring shape
Insulation	Polyethylene (PE)
Insulated	Yes
Colour insulation	Yellow
Nominal cross section (mm ²)	2.63 - 6.64
Reel/roll packaging	No
Sleeve form	Short
Colour	Yellow
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Temperature protected till (°C)	75
For pull protected connections	Yes
Material	Copper
Surface protection	Tinned
Max. current (I _{max}) (A)	50
Stud size (imperial)	Other
Halogen free	Yes
Total length (mm)	44
(mm)	6.4
(mm)	15
(mm)	44
Amperage (A)	48
(V)	600
Watertight	Yes
Temperature (°C)	70
Yes	
Yes	
No	