


Klemko Techniek B.V.  
Tel.: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

**Geïsoleerde Kabelschoen Waterdicht**

/productimages/131080.jpg

Package type: BX á 50 pce

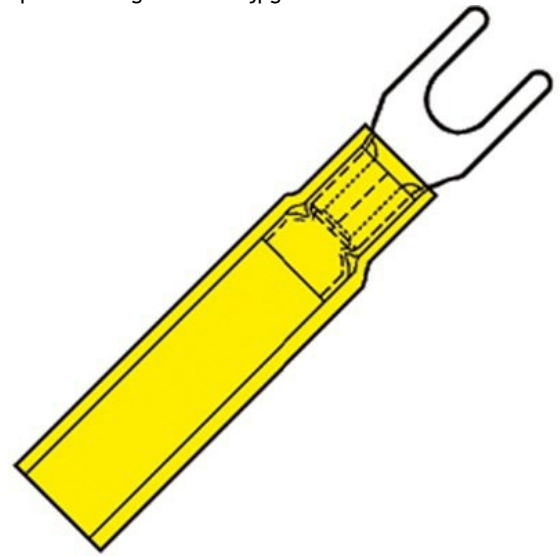

**PRODUCT SPECIFICATIONS:**

|  |                   |
|--|-------------------|
| Bolt dimension (metric)                    | 4                 |
| Flange shape                               | Fork shape        |
| Insulation                                 | Polyethylene (PE) |
| Insulated                                  | Yes               |
| Colour insulation                          | Yellow            |
| Nominal cross section (mm <sup>2</sup> )   | 2.63 - 6.64       |
| Reel/roll packaging                        | No                |
| Sleeve form                                | Short             |
| Colour                                     | Yellow            |
| Suitable for solid conductors              | No                |
| Suitable for stranded conductors           | Yes               |
| Suitable for fine strand conductors        | Yes               |
| Suitable for high temperatures (to 650 °C) | No                |
| Suitable for insulated varnish             | No                |
| Suitable for round conductors              | Yes               |
| Suitable for flat conductors               | No                |
| Temperature protected till (°C)            | 75                |
| For pull protected connections             | Yes               |
| Material                                   | Copper            |
| Surface protection                         | Tinned            |
| Max. current (I <sub>max</sub> ) (A)       | 50                |
| Stud size (imperial)                       | Other             |
| Halogen free                               | Yes               |
| Total length (mm)                          | 38                |
| (mm)                                       | 6.4               |
| (mm)                                       | 9                 |
| (mm)                                       | 38                |
| Amperage (A)                               | 48                |
| (V)  | 600               |
| Watertight                                 | Yes               |
| Yes  |                   |
| Yes  |                   |
| No   |                   |