

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 220013 - P-150

Parallel Verbinders Ongeisoleerd

Package type: BX á 25 pce

/productimages/220013.jpg

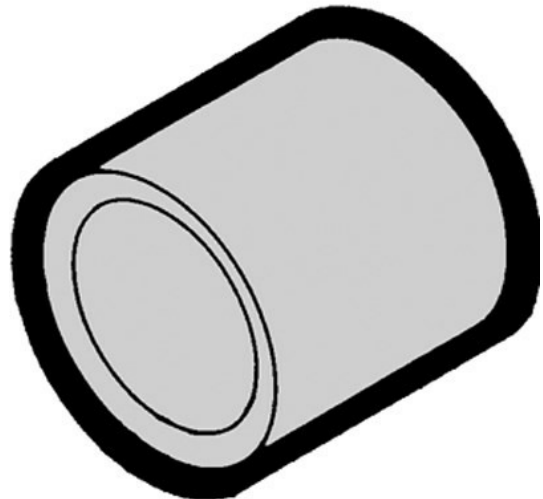

**PRODUCT SPECIFICATIONS:**

Nominal cross section (mm <sup>2</sup> )	150 - 150
Min. AWG-size	250 kcmil
Max. AWG-size	250 kcmil
Model	UL model
Sleeve form	Short
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Material	Copper
Surface protection	Tinned
Insulation	None
Voltage level	Up to 600 V
Type of connection	Parallel connector
Number of branches	0
For pull protected connections	No
Oil stop/centre bar	No
Nominal current (A)	405
(mm)	27
(mm)	19.5
(mm)	26.4
No	