

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 220020 - C-2

Stoot Verbinder Ongeïsoleerd

Package type: BX á 100 pce

/productimages/220020.jpg

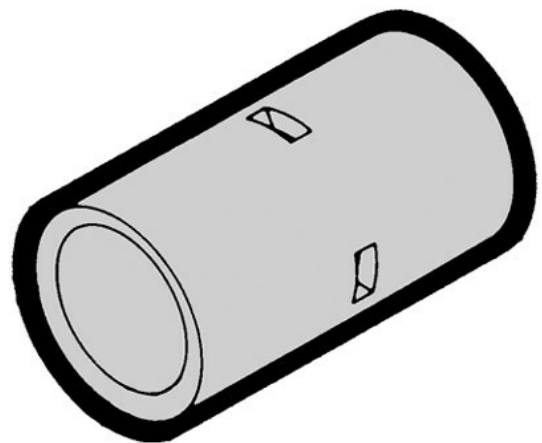

**PRODUCT SPECIFICATIONS:**

Nominal cross section (mm <sup>2</sup> )	2.5 - 2.5
Min. AWG-size	14
Max. AWG-size	14
Model	UL model
Sleeve form	Long
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Material	Copper
Surface protection	Tinned
Insulation	None
Voltage level	Up to 600 V
Type of connection	Percussion connector
For pull protected connections	No
Oil stop/centre bar	No
Nominal current (A)	30
Max. temperature (°C)	120
(mm)	15
(mm)	2.3
(mm)	3.9
No	