

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 220050 - C-14

Stoot Verbinder Ongeïsoleerd

Package type: BX á 25 pce

/productimages/220050.jpg

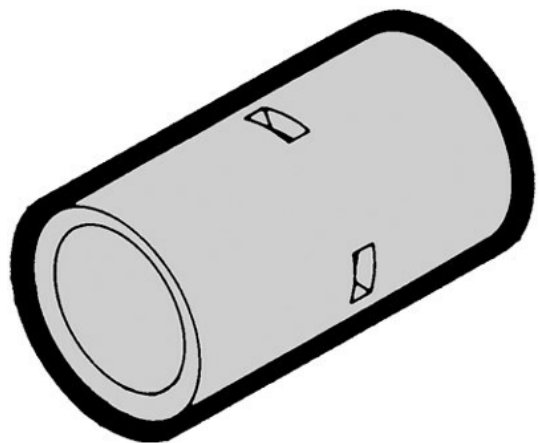

**PRODUCT SPECIFICATIONS:**

Nominal cross section (mm <sup>2</sup> )	16 - 16
Min. AWG-size	6
Max. AWG-size	6
Model	UL model
Sleeve form	Long
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Material	Copper
Surface protection	Tinned
Insulation	None
Voltage level	Up to 600 V
Type of connection	Percussion connector
For pull protected connections	No
Oil stop/centre bar	No
Nominal current (A)	95
Max. temperature (°C)	120
(mm)	21
(mm)	5.8
(mm)	8.9
No	