


Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

Stoot Verbinder Ongeïsoleerd

/productimages/220080.jpg

Package type: BX á 25 pce

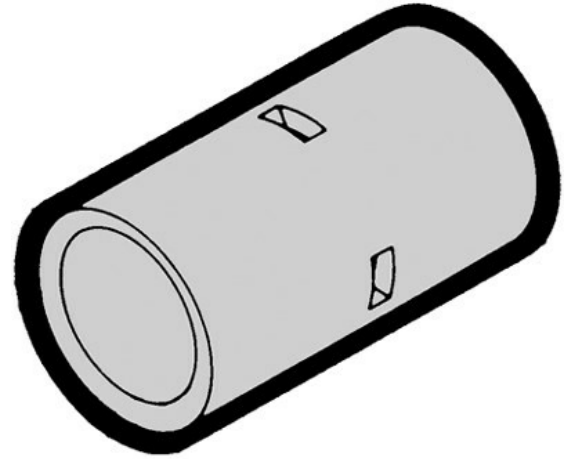

PRODUCT SPECIFICATIONS:

Nominal cross section (mm ²)	50 - 50
Min. AWG-size	1
Max. AWG-size	1
Model	UL model
Sleeve form	Long
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Material	Copper
Surface protection	Tinned
Insulation	None
Voltage level	Up to 600 V
Type of connection	Percussion connector
For pull protected connections	No
Oil stop/centre bar	No
Nominal current (A)	230
Max. temperature (°C)	120
(mm)	36
(mm)	11.4
(mm)	15.3
No	