

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl


klemko®

220120 - C-150

Stoot Verbinder Ongeïsoleerd

</productimages/220120.jpg>

Package type: BX á 25 pce

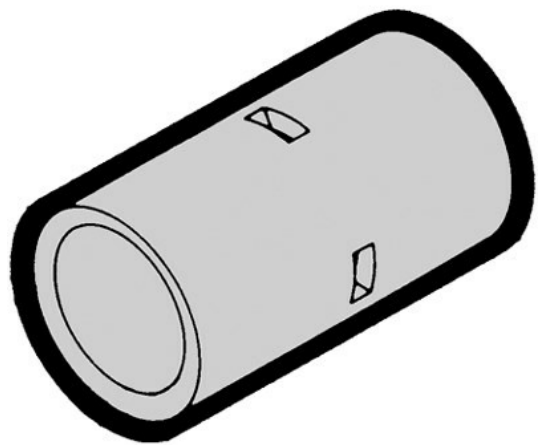

PRODUCT SPECIFICATIONS:

Shape	Percussion connector
Insulated	No
Nominal cross section (mm ²)	150 - 150
Min. AWG-size	250 kcmil
Max. AWG-size	250 kcmil
Model	UL model
Sleeve form	Long
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Material	Copper
Surface protection	Tinned
Insulation	None
Voltage level	Up to 600 V
Type of connection	Percussion connector
For pull protected connections	No
Oil stop/centre bar	No
Nominal current (A)	405
Max. temperature (°C)	120
(mm)	54
(mm)	19.5
(mm)	26.4
Packaging	Bag
No	