

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860033.jpg

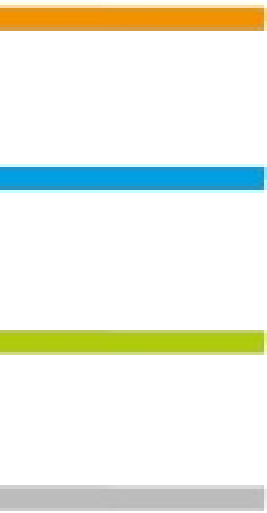
Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

| | |
|--|-----------------|
| Protocol | Phase cut-off |
| Model | Dynamic |
| Output power (W) | 9 - 18 |
| Housing | Plastic housing |
| Suitable for constant voltage | No |
| Output voltage (V) | 27 - 54 |
| Input voltage (V) | 220 - 240 |
| Suitable for DC-voltage (primary side) | No |
| Suitable for constant current | Yes |
| Output current (mA) | 350 - 350 |
| No | |
| Degree of protection (IP) | IP20 |
| Suitable for outdoor use | No |
| Length (mm) | 120 |
| Width (mm) | 53 |
| Height (mm) | 27 |
| Rated frequency (Hz) | 50 - 60 |
| 0.95 | |
| Max. starting current (A) | 5 |
| Ambient temperature (°C) | -20 - +55 |
| White | |
| Yes | |
| 9 - 15 | |
| 3 - 5 | |
| Frequency input voltage (Hz) | 50 - 60 |
| Independently operating | Yes |
| Yes | |
| Overload protection | Yes |
| Yes | |
| Overtemperature protection | Yes |
| Yes | |
| Yes | |
| No | |
| None | |
| Dimmable | Yes |
| Operation by Bluetooth | No |
| Dimming DALI-2 | No |
| Dimming potentiometer (integrated) | No |
| Dimming 1-10 V | No |
| Dimming phase cut-on | No |
| Dimming DALI | No |
| (%) | 10 - 100 |

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, and grey, stacked vertically.

| | |
|-----------------------------|-----|
| Dimming DMX | No |
| Constant light output (CLO) | No |
| Dimming Touch and Dim | No |
| Dimming DSI | No |
| Dimming Zigbee | No |
| Dimming phase cut-off | Yes |
| Dimming 0-10 V | No |