

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

860033 - DRV-18W350PD-MS

Leddriver constante stroom

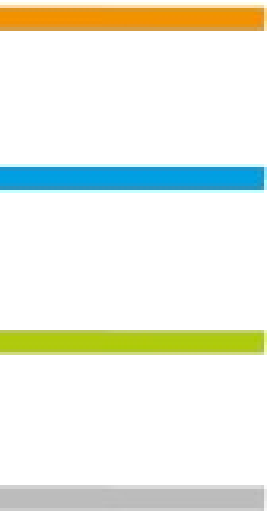
/productimages/860033.jpg

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Protocol	Phase cut-off
Model	Dynamic
Output power (W)	9 - 18
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	27 - 54
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	350 - 350
No	
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	120
Width (mm)	53
Height (mm)	27
Rated frequency (Hz)	50 - 60
0.95	
Max. starting current (A)	5
Ambient temperature (°C)	-20 - +55
White	
Yes	
9 - 15	
3 - 5	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	No
Dimming potentiometer (integrated)	No
Dimming 1-10 V	No
Dimming phase cut-on	No
Dimming DALI	No
(%)	10 - 100
Dimming DMX	No
Constant light output (CLO)	No

A series of five horizontal bars in orange, blue, light green, and grey, stacked vertically on the left side of the page.

Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	Yes
Dimming 0-10 V	No
Yes	