

Klemko Techniek B.V.
Tel.: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860052.jpg

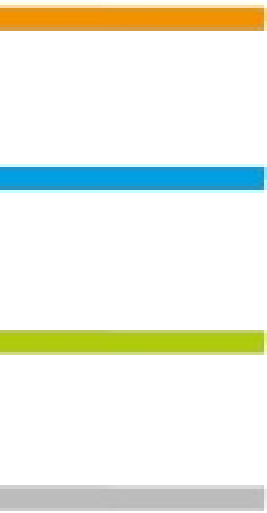
Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Protocol	Phase cut-off
Model	Static
Output power (W)	6 - 9
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	8.6 - 12.9
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	700 - 700
No	
Degree of protection (IP)	IP20
Protection class	II
Suitable for outdoor use	No
Length (mm)	85
Width (mm)	40.4
Height (mm)	22
Rated frequency (Hz)	50 - 60
0.9	
Ambient temperature (°C)	-25 - +50
(%)	5
White	
No	
Number of channels	1
3 - 4	
1 - 1	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	No
Dimming potentiometer (integrated)	No
Suitable for pulse button	No
Dimming 1-10 V	No

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, lime green, and grey, stacked vertically.

Dimming phase cut-on	No
Dimming DALI	No
(%)	10 - 100
Dimming DMX	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	Yes
Dimming 0-10 V	No