

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

## 860228 - LD-CC-ZG-MO-50

Leddriver constante stroom


/productimages/860228.jpg

Package type: CT á 1 pce



**PRODUCT SPECIFICATIONS:**

Protocol	Zigbee
Model	Dynamic
Output power (W)	1 - 50
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	8 - 48
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	250 - 1000
Yes	
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	210
Width (mm)	50
Height (mm)	32
Rated frequency (Hz)	50 - 60
0.97	
Max. starting current (A)	8
Ambient temperature (°C)	-20 - +45
White	
No	
No	
Number of channels	1
3 - 15	
1 - 5	
1 - 5	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
Short-circuit protected	Yes
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Dimming RF	No

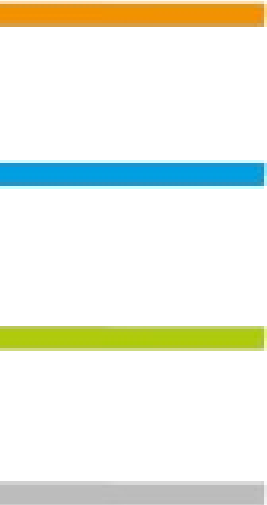

Dimming manufacturer's proprietary system	No
Dimming 1-10 V	No
Dimming LineSwitch	No
Dimming phase cut-on	No
Dimming DALI	No
Dimming programmable	Yes
Dimming Sine Wave Reduction (%)	0.1 - 100
Dimming DMX	No
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	Yes
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	No
No	