

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860232.jpg

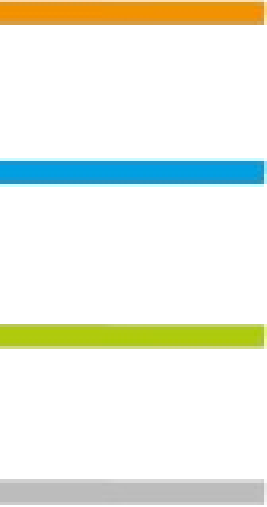
Leddriver constante spanning

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Protocol	Z-wave
Model	Dynamic
Output power (W)	1 - 96
Housing	Plastic housing
Suitable for constant voltage	Yes
Output voltage (V)	24 - 24
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	No
No	
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	244
Width (mm)	64
Height (mm)	32
Rated frequency (Hz)	50 - 60
Ambient temperature (°C)	-20 - +45
No	
No	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Dimming RF	No
Dimming manufacturer's proprietary system	No
Dimming 1-10 V	No
Dimming LineSwitch	No
Dimming phase cut-on	No
Dimming DALI	No
Dimming programmable	No

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, and grey, stacked vertically.

Dimming Sine Wave Reduction	No
Dimming DMX	No
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
No	