

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

860436 - DALI-4X8A36-4AD

Kleurcontroller voor Led

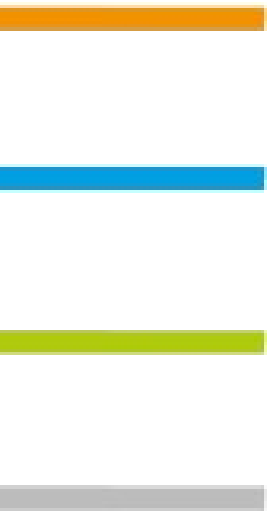
/productimages/860436.jpg

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Protocol	DALI
Model	Static
Output power (W)	1 - 288
Housing	Plastic housing
Suitable for constant voltage	Yes
Output voltage (V)	12 - 36
Input voltage (V)	12 - 36
Suitable for DC-voltage (primary side)	Yes
Suitable for constant current	No
Output current (mA)	1 - 8000
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	168
Width (mm)	58
Height (mm)	28
Rated frequency (Hz)	50 - 50
Ambient temperature (°C)	-20 - +50
White	
No	
Number of channels	4
(W)	288
Independently operating	Yes
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
Short-circuit protected	Yes
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	No
IFTTT support available	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Compatible with Apple HomeKit	No
Dimming RF	No
Dimming manufacturer's proprietary system	No
Dimming 1-10 V	No
Dimming LineSwitch	No

A series of five horizontal bars in orange, blue, green, and grey are positioned on the left side of the page, partially overlapping the table's first column.

Dimming phase cut-on	No
Dimming DALI	Yes
Dimming programmable	Yes
Dimming Sine Wave Reduction	No
Dimming DMX	No
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
No	