

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

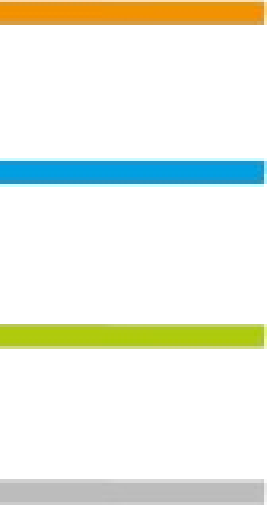
860666 - LD-CV-50W-LE

860190.jpg

Package type: CT á 1 pce

PRODUCT SPECIFICATIONS:

Model	Static
Output power (W)	1 - 50
Housing	Plastic housing
Suitable for constant voltage	Yes
Output voltage (V)	24 - 24
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	No
Degree of protection (IP)	IP20
Protection class	II
Suitable for outdoor use	No
Length (mm)	210
Width (mm)	50
Height (mm)	32
Ambient temperature (°C)	-20 - +45
White	
No	
Number of channels	1
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
Short-circuit protected	Yes
No	
None	
Dimmable	Yes
Operation by Bluetooth	Yes
Dimming DALI-2	No
IFTTT support available	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Compatible with Apple HomeKit	No
Dimming RF	Yes
Dimming manufacturer's proprietary system	Yes
Dimming 1-10 V	No
Dimming LineSwitch	No
Dimming phase cut-on	No

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, and grey. The blue bar is the most prominent and is positioned between the orange and light green bars.

Dimming DALI	No
Dimming programmable	Yes
Dimming Sine Wave Reduction (%)	No
Dimming DMX	1 - 100
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	No