

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860730.jpg

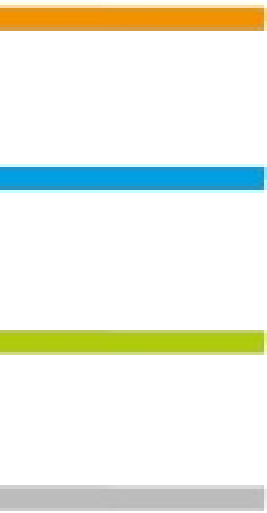
Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Model	Dynamic
Output power (W)	3 - 45
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	11 - 50
Input voltage (V)	220 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	250 - 1400
Yes	
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	229
Width (mm)	82
Height (mm)	34
Rated frequency (Hz)	50 - 60
0.9	
Ambient temperature (°C)	0 - 40
White	
No	
4 - 15	
4 - 15	
2 - 5	
2 - 5	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Operation by Bluetooth	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Suitable for pulse button	Yes
Dimming 1-10 V	No
Dimming phase cut-on	No
Dimming DALI	No
(%)	100 - 1

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, and grey, stacked vertically.

Dimming DMX	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	Yes
Dimming with push-button	Yes