

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

## 867670 - MIL11ALU-L-WW-0,5W

MIL11 industriële led spots


Package type: BG á 1 pce

/productimages/867670.jpg



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Built-in
Dimmable	Yes
Colour temperature (K)	3000 - 3000
Colour of light adjustable	No
Rated luminous flux according to IEC 62722-2-1 (lm)	30
(lm)	0 - 30
(lm/W)	0 - 60
Nominal voltage (V)	12 - 12
Voltage type	DC
Max. system power (W)	0.5
Energy efficiency class of the light source according to EU regulation 2019/2015	Not required
Beam angle	Wide beam 41-80°
Beam angle (°)	60
Built-in height (mm)	30 - 30
Length (mm)	25.5
Width (mm)	15
Height/depth (mm)	30
Outer diameter (mm)	15
Built-in diameter (mm)	11 - 11
Housing colour	Silver
Degree of protection (IP), front side	IP67
Other	
Degree of protection (IP)	IP67
Suitable for ceiling mounting	Yes
Suitable for wall mounting	Yes
Luminous flux adjustable	Continuously variable
Suitable for lamp power (W)	0.5 - 0.5
Suitable for clamp-mounting	Yes
Adjustability	not adjustable
Lamp type	LED not exchangeable
Electrical connection with connector system	No
Type of control gear	LED operating device voltage-controlled
With control gear	No
Colour of light	White
Housing material	Aluminium
Light sharing	Symmetric
Colour rendering index CRI	90-100
Suitable for built-in mounting	Yes
Optics	Lens
(cm)	100
Light distributor	Focal lens

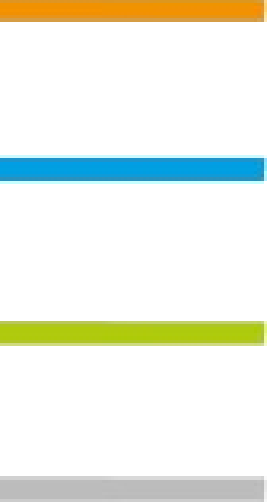

Light outlet	Direct
Number of poles	2
Exchangeable control gear	Yes
With mounting bracket	No
With presence indicator	No