

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl

# klemko®

## 868113 - LM-BTSP10W-DTW

Lumiko modulair B-trackspots


Package type: CT á 1 pce

/productimages/868113.jpg



**PRODUCT SPECIFICATIONS:**

|  |   |
|--|---|
| Colour temperature (K)   | 1800 - 3000                             |
| Colour of light adjustable   | No                                      |
| Nominal voltage (V)  | 230 - 230                               |
| Voltage type   | AC                                      |
| Max. system power (W)  | 10                                      |
| (lm)   | 0 - 1000                                |
| Energy efficiency class of the light source according to EU regulation 2019/2015 | E                                       |
| Beam angle   | Medium beam 21-40°                      |
| Beam angle (°)   | 15                                      |
| Length (mm)  | 60                                      |
| Width (mm)   | 94                                      |
| Height/depth (mm)  | 106                                     |
| (mm)   | 44                                      |
| Outer diameter (mm)  | 44                                      |
| Housing colour   | Black                                   |
| Degree of protection (IP), front side  | IP20                                    |
| IP20   |   |
| Luminous flux adjustable   | Continuously variable                   |
| Suitable for lamp power (W)  | 10 - 10                                 |
| Suitable for light-track mounting  | Yes                                     |
| Adjustability  | Rotating and swivelling                 |
| Lamp type  | LED not exchangeable                    |
| With light source  | Yes                                     |
| Electrical connection with connector system                                      | Yes                                     |
| Type of control gear   | LED operating device current-controlled |
| With control gear  | Yes                                     |
| Colour of light  | White                                   |
| Housing material   | Aluminium                               |
| Light sharing  | Symmetric                               |
| Colour rendering index CRI   | 90-100                                  |
| Optics   | Lens                                    |
| Suitable for low voltage cable system  | No                                      |
| Yes  |   |
| Surface protection   | Powder coating                          |
| Surface brushed  | No                                      |
| Dimming 1-10 V   | No                                      |
| Dimming DALI   | No                                      |
| Dimming DSI  | No                                      |
| Dimming potentiometer (integrated)   | No                                      |
| Dimming LineSwitch   | No                                      |
| Dimming phase cut-on   | No                                      |
| Light distributor  | Focal lens                              |

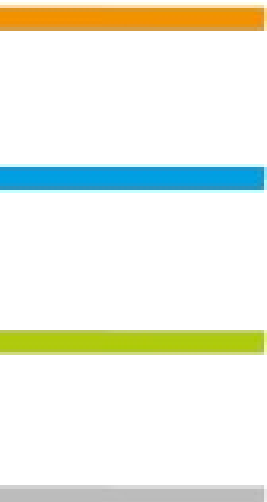

|   |                |
|---|----------------|
| Light outlet                              | Direct         |
| Number of poles                           | 3              |
| Connection type                           | Busbar adapter |
| Colour consistency (McAdam ellipse)       | SDCM2          |
| With mounting bracket                     | No             |
| With presence indicator                   | No             |
| Dimming manufacturer's proprietary system | No             |
| Dimmable                                  | Yes            |
| Dimming phase cut-off                     | Yes            |
| Dimming 0-10 V                            | No             |
| Dimming DMX                               | No             |
| Dimming DALI-2                            | No             |