

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/868657.jpg


Lumiko modulair spots

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Built-in
Colour temperature (K)	3000 - 3000
Luminous flux (lm)	0 - 650
Suitable for lamp power (W)	6.6 - 6.6
Max. system power (W)	6.6
Nominal current (mA)	0 - 700
Nominal voltage (V)	9.5 - 9.5
Adjustability	not adjustable
With movement sensor	No
With light sensor	No
Lamp type	LED exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Degree of protection (IP)	IP20
Type of control gear	LED operating device current-controlled
With control gear	Yes
Housing material	Aluminium
Housing colour	White
Rated luminous flux according to IEC 62722-2-1 (lm)	650
Reflector	High-gloss
Light sharing	Symmetric
Beam angle	Medium beam 21-40°
Length (mm)	65
Width (mm)	65
Beam angle (°)	30
(mm)	44
Built-in depth (mm)	60
Voltage type	DC
Colour of light	White
Colour rendering index CRI	80-89
Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Optics	Reflector
Yes	
(cm)	50
Dimming phase cut-off	Yes
Dimming phase cut-on	No
Light distributor	Reflector
Light outlet	Direct

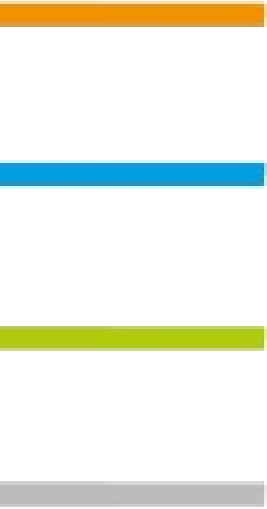

Built-in diameter (mm)	58 - 58
Number of poles	2
Emergency power supply integrated	No
With mounting bracket	No