


/productimages/870500.jpg

Bewegingsmelder inbouw

Package type: CT á 1 pce

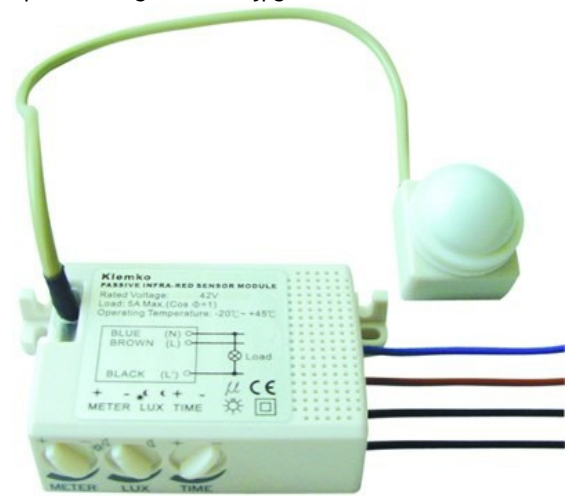

PRODUCT SPECIFICATIONS:

Model	Movement sensor
Passive infrared	
Technique	Passive infrared
Constant light control	No
HVAC-control	No
Forced switch off	No
Relay	
Networkable	No
Suitable for wall mounting	No
Optimum mounting height (m)	2.5
Max. reach sideways (m)	6
Diameter reach on floor (m)	6
(W)	100
Suitable for wireless transmission	No
Remote operation	No
2	
With remote control	No
Response value sensitivity adjustable	Yes
Response value luminosity adjustable	Yes
(W)	1000
Teach-function for response value luminosity	No
Dim function with dimmer basic element	No
Mounting method	Flush mounted (plaster)
Material	Plastic
Material quality	Thermoplastic
Colour	White
RAL-number (similar)	9010
Transparent	No
Degree of protection (IP)	IP55
Voltage type	AC
Min. switch-on time (s)	6
Max. duty cycle (min)	20
Detection angle horizontal (°)	1 - 100
(m)	0.35
Response value luminosity (lx)	5 - 10000
Max. switching power (W)	1000
(W)	1.1
Built-in size (mm)	22
Number of switching zones	1
Max. starting current (A)	78
Frequency (Hz)	50 - 60

Scan angle (°)	100
Max. presence range (m ²)	30
Connection type	Open end
With connection cable	No
Width (mm)	82
Height (mm)	20.5
Depth (mm)	45
Built-in diameter (mm)	22
Yes	
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
IFTTT support available	No
Nominal voltage (V)	230 - 230
(V)	220 - 240
(m ²)	30
No	
Yes	
Compatible with Casambi	No