

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®


870556 - PLF-IB-PIRS10-G3

870550.jpg

Package type: CT á 1 pce

PRODUCT SPECIFICATIONS:

Mounting method	Flush mounted (plaster)
Ceiling	
Degree of protection (IP)	IP44
Response value luminosity (lx)	10 - 2000
HVAC-control	Yes
Optimum mounting height (m)	2.5
Model	Movement sensor
Constant light control	No
Yes	
Remote operation	Yes
With remote control	No
Width (mm)	80
Height (mm)	12.2
Diameter (mm)	80
Built-in width (mm)	65
Built-in depth (mm)	38.5
Built-in diameter (mm)	65
Length of connection cable (mm)	11000
Max. mounting height (m)	4
Max. reach sideways (m)	3.5
Max. reach frontally (m)	1.5
Diameter reach on floor (m)	7
Number of switching zones	1
Passive infrared	
RJ12	
Staircase monitoring	No
Colour	White
RAL-number (similar)	9010
Material	Plastic
Material quality	Thermoplastic
Surface protection	Lacquered
Surface finishing	Matt
Max. starting current (A)	165
Min. switch-on time (s)	5
Max. duty cycle (min)	30
Detection angle horizontal (°)	30 - 360
Pivoting range sensor, vertical (°)	0 - 30
Max. presence range (m²)	40
Scan angle (°)	360
Connection type	Push-in clamp
Substation input	Yes
Suitable for ceiling mounting	Yes
Suitable for wall mounting	No
Suitable for wireless transmission	No

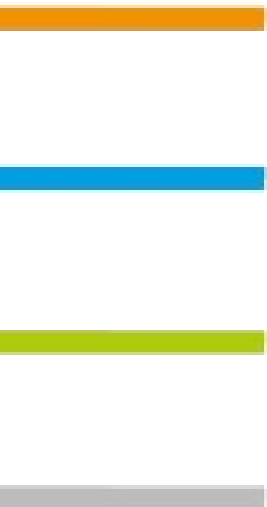

Forced switch off	No
With connection cable	Yes
Yes	
(m ²)	40
(m ²)	40
Yes	
Ambient temperature (°C)	-20 - +45
Dim function with dimmer basic element	No
Networkable	No
No	
Compatible with Apple HomeKit	No
Compatible with Casambi	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No
No	
With alarm function	No
No	
Yes	
Animal zone	No
Transparent	No
IFTTT support available	No
Anti-bacterial treatment	No
Protocol	On/Off