

Klemko Techniek B.V.
Tel.: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/863686.jpg

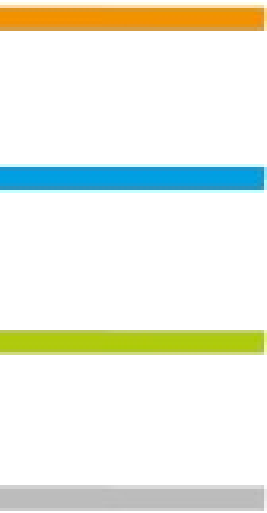
Led spots. opbouw

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Surface mounting
Colour temperature (K)	3000 - 3000
Colour of light adjustable	No
Nominal current (mA)	0 - 350
Nominal voltage (V)	8.8 - 8.8
Voltage type	DC
Max. system power (W)	3.1
(lm)	0 - 320
Energy efficiency class of the light source according to EU regulation 2019/2015	E
Beam angle	Medium beam 21-40°
Beam angle (°)	40
Width (mm)	36
Height/depth (mm)	45
Outer diameter (mm)	32
Housing colour	Black
Degree of protection (IP), front side	IP44
Other	
Suitable for ceiling mounting	Yes
Suitable for wall mounting	Yes
Luminous flux adjustable	Continuously variable
Suitable for lamp power (W)	3.1 - 3.1
Suitable for pedestal/floor mounting	Yes
Adjustability	Swivelling
Lamp type	LED not exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Type of control gear	LED operating device current-controlled
With control gear	No
Colour of light	White
Housing material	Aluminium
Moulded-on	
Light sharing	Symmetric
Colour rendering index CRI	80-89
Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Optics	Reflector
(cm)	100
Light distributor	Reflector
Light outlet	Direct

On the left side of the page, there are five horizontal bars of different colors: orange, blue, light green, and grey, stacked vertically.

Number of poles	2
Colour consistency (McAdam ellipse)	SDCM1
Exchangeable control gear	Yes
Beam angle adjustable	No
With mounting bracket	Yes
With presence indicator	No
Dimmable	Yes