

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/876850.jpg


Led spots. inbouw

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Built-in
Dimmable	Yes
Colour temperature (K)	3000 - 3000
Colour of light adjustable	No
Dimming phase cut-off	Yes
(lm)	0 - 215
(lm/W)	0 - 102
Nominal current (mA)	0 - 700
Nominal voltage (V)	3 - 3
Voltage type	DC
Max. system power (W)	2.1
Energy efficiency class of the light source according to EU regulation 2019/2015	E
Beam angle	Medium beam 21-40°
Beam angle (°)	35
Built-in height (mm)	27 - 27
Height/depth (mm)	27
Outer diameter (mm)	50
Built-in diameter (mm)	45 - 45
Housing colour	Aluminium
Degree of protection (IP), front side	IP44
Other	
Luminous flux adjustable	Continuously variable
Suitable for lamp power (W)	2.1 - 2.1
Adjustability	Rotating and swivelling
Lamp type	LED not exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Type of control gear	LED operating device current-controlled
With control gear	Yes
Colour of light	White
Housing material	Aluminium
Light sharing	Symmetric
Colour rendering index CRI	80-89
Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Optics	Lens
Light distributor	Focal lens
Light outlet	Direct
Number of poles	2

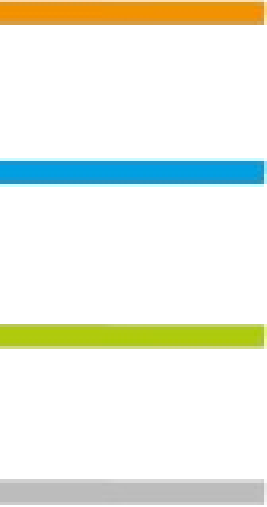

Connection type	Push-in clamp
Colour consistency (McAdam ellipse)	SDCM1
Exchangeable control gear	Yes
Beam angle adjustable	No
With presence indicator	No